

SmartPower 25 – 400 t

Servo-hydraulic efficiency

world of innovation



EFFICIENT – PRECISE – VERSATILE

The smart basis for your success

The advantages

- » Highly compact servo-hydraulic injection molding machine with outstanding stability
- » High-precision injection units with extensive equipment options
- » Top efficiency with „drive-on-demand“ drive system as standard
- » Additional energy saving through patented KERS energy recovery system
- » User-friendly thanks to new UNILOG B8 control system with integrated assistance systems
- » Short mold changing time through ergonomically optimized clamping system
- » Conversion into a full production cell possible with WITTMANN peripherals and the WITTMANN 4.0 “plug & produce” integration package
- » Attractive price/performance ratio

The machine series

SmartPower standard: 18 machine sizes with clamping forces ranging from 25 to 400 t

SmartPower MEDICAL: for clean-room applications with clamping forces ranging from 25 to 400 t

SmartPower COMBIMOULD: for multi-component injection molding with clamping forces ranging from 60 to 400 t





SmartPower


The system highlights

- » **Servo drive is standard for the hydraulic system ("drive-on-demand")**
All SmartPower machines are equipped with a combination of fast-responding servo motors with high-performance fixed displacement pumps as standard. The system benefits are extreme dynamism, high speed and precision of the machine movements and minimal energy consumption.
- » **Plasticizing unit – compact, maintenance-friendly**
All SmartPower plasticizing/injection units are pivotable and designed for easy access. This offers optimal conditions for quick access to the screw. Optionally a servo electric screwdrive or a fully electric injection unit is available.
- » **KERS – the optimal energy utilization system**
The patented KERS (Kinetic Energy Recovery System) for injection molding machines transforms the kinetic energy released by deceleration processes into electrical energy. The resulting electrical power is utilized within the machine, e. g. for barrel heating. KERS enables an additional energy consumption cut of up to 5%.
- » **Well-balanced clamping system protects the molds**
The 4-pillar clamping system, with force transmission via a central pressure pad and two diagonally positioned fast-stroke cylinders, ensures optimal force transmission into the mold and simultaneously a high level of mold protection.
- » **Sensitive mold protection**
Without coming into contact with the tie-bars, the moving platen is guided on linear guides and rotating roller bearings via a sturdy moving carriage with a high load capacity for heavy molds. The minimal rolling friction of the moving platen guide system offers ideal conditions for highly sensitive mold protection and cleanness.

CLAMPING UNIT

A perfectly balanced power pack

- » **Ample space for the mold and for symmetrical force distribution**
Generously dimensioned mold platens and a clamping system with perfect symmetrical force distribution provide an optimal environment for all kinds of injection molding tools, including all types of media connections. [1]
- » **Sensitive and precise**
Within the *SmartPower* clamping system, the exclusive task of the tie bars is force transmission between the external platens. Without tie bar contact, the moving platen travels on the linear bearings virtually free of friction [2]. In very few steps, the tie bars can be optionally retracted and reset. [3]
- » **Fast movements**
 - The moving platen is driven by two diagonally positioned travel cylinders. [4]
 - Combination of the travel cylinders with a hydraulic differential gear system enables quick movements.
 - The travel cylinders are dimensioned for high opening forces. [4]
- » **Compact design for minimal footprint**
The suction valve placed at the bottom of the pressure cylinder reduces the length of the clamping unit to a minimum. [5]
- » **Maintenance-friendly and easy to clean**
 - Ample use of rigid hydraulic tubes in lieu of hoses reduces potential maintenance requirements. [6]
 - Easy access to the ejector area and platen environment for machine setting [7]

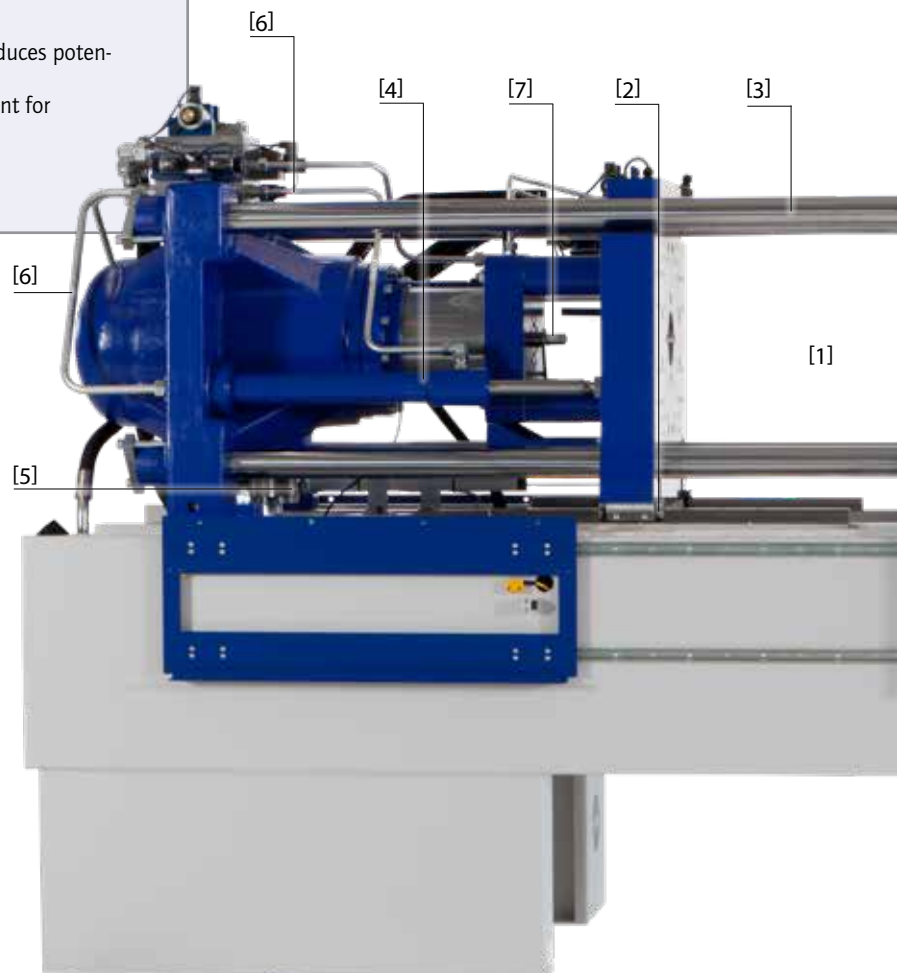

INJECTION UNIT

Versatile precision

Wittmann

Battenfeld

- » **Everything designed for series stability**
 - All screws > 25 mm come with a 22:1 L/D ratio.
 - Ultimate repeatability with an optional controlled servo valve
 - Momentum-free nozzle system thanks to axial positioning of the travel cylinders [8]
 - Plasticizing barrels can be fitted to different injection units with identical screw diameter
 - WITTMANN BATTENFELD HiQ software modules (optional) offer sensitive control strategies to compensate external factors such as temperature, moisture, regrind or masterbatch content variations.
- » **Optimal operability and flexibility**
 - Free access to the injection unit for easy material feeding, machine setting and servicing
 - All injection units up to size 3400 are pivotable (for quick screw replacement)



Anti-wear options

In addition to the premium-quality standard equipment, an extensive range of options is available to provide extra anti-wear and/or anti-corrosion protection. Predefined option packages and a selection matrix facilitate the selection of the right plasticizing unit.

DRIVE TECHNOLOGY

Energy efficiency with "drive-on-demand"




Fast-responding, precise, thrifty

"Drive-on-demand" is the innovative combination of a fast-responding, speed-controlled, air-cooled servo motor with a fixed displacement pump. This drive unit is only activated when required by movements and pressure build-up. During cooling times or cycle pauses for parts handling, the servo drive remains switched off and thus consumes no energy. In operation, "drive-on-demand" is the basis for highly dynamic, controlled machine movements and short cycle times.

The "drive-on-demand" system is standard in the *SmartPower* machine series. In this way, the machine series already comply with the EU Energy Directive 2020.

A brake on operating costs

- » The "drive-on-demand" system is standard equipment.
- » "Drive-on-demand" lowers energy consumption by up to 35 per cent compared to modern variable displacement pump systems.
- » Additional energy cost cuts through reduction of idle power
- » Lower total expense for cooling, since oil cooling is normally not required
- » Lower maintenance expense through longer preservation of the oil quality due to less thermal load
- » Lower sound emission levels, consequently less investment in sound protection required
- » Easy retrofit of a second servo drive package for parallel movements [1]

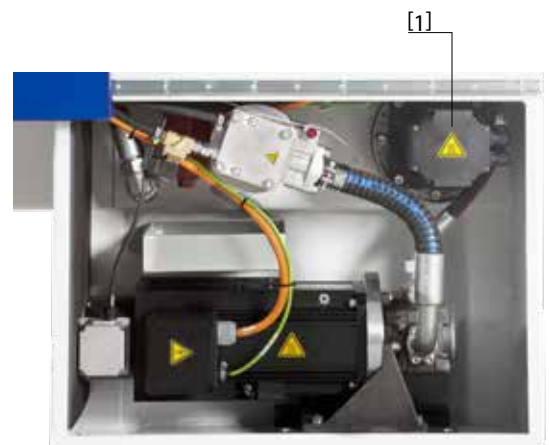

INSIDER CONCEPT

"ex works" production cell

Wittmann

Battenfeld


The insider concept is an ex-works solution to transform a *SmartPower* injection molding machine into a fully fledged production cell. In its basic version, the equipment cell integrates a parts handling system, a conveyor belt for parts transport and a protective housing firmly connected with the machine. Additional equipment modules for further processing, quality documentation and packaging are available as options. For the design and configuration of such higher automation levels, WITTMANN BATTENFELD places the combined expert knowledge of the entire group at its customers' disposal.

The advantages of insider automation

- » **Material flow systematization**
thanks to a uniform logistics interface for finished parts transfer at the end of the clamping unit, a prerequisite for positioning of several machines in rows
- » **Reduction of production space**
by up to 50 % compared to conventional automation solutions
- » **Minimization of robot cycle times**
through shorter travel paths and immediate parts depositing on conveyor belt
- » **Easy access in spite of integration**
to the mold and the robot thanks to mobility of the conveyor belt integrated in the protective housing
- » **Cost benefits,**
since safety features for all danger areas are already in place and certified ex works.
- » **CE mark included**
for every machine with an insider solution. No more costs for individual approval.



CE certified by type examination

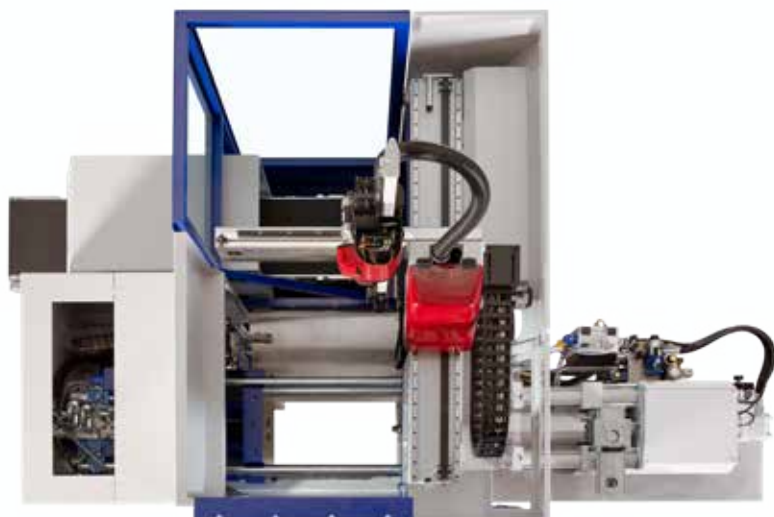

UNILOG B8

Complex matters simplified

The new UNILOG B8 machine control system is the WITTMANN BATTENFELD solution to facilitate the operation of complex processes for human operators. For this purpose, the integrated industrial PC has been equipped with an enlarged intuitive touch screen operator terminal. The visualization screen is the interface to the new Windows® 10 IoT operating system, which offers extensive process control functions. Next to the pivotable monitor screen, a connected panel/handset is mounted on the machine's central console.



UNILOG B8

Highlights

- » **Operating logic**
with a high degree of self-explanation, similar to modern communication devices
- » **2 major operating principles**
 - Operating/movement functions via tactile keys
 - Process functions on touch screen (access via RFID, key card or key ring)
- » **Process visualization**
via 21.5" touch screen display (full HD), pivoting laterally
- » **New screen functions**
 - Uniform layout for all WITTMANN appliances
 - Recognition of gestures (wiping and zooming by finger movements)
 - Container function – split screen for sub-functions and programs
- » **Status visualization**
uniform signaling system across the entire WITTMANN group
 - Headline on the screen with colored status bars and pop-up menus
 - ambiLED-display on machine
- » **Operator assistance**
 - *QuickSetup*: process parameter setting assistant using an integrated material database and a simple query system to retrieve molded part data with machine settings pre-selection
 - Extensive help library integrated

The process in constant view

Wittmann

Battenfeld

» **SmartEdit**


SmartEdit is a visual, icon-based cycle sequence programming facility, which enables direct addition of special functions (core pulls, air valves, etc.) based on a standard process via touch operation on the control system's monitor. In this way, a total user-defined sequence can be compiled from a sequence menu. This machine cycle, visualized either horizontally or vertically, can be adjusted simply and flexibly to the process requirements by finger touch with "drag & drop" movements.

The advantages

- Icon visualization ensures clarity.
- Clear events sequence through node diagram
- Alterations without consequences through "dry test runs"
- Theoretical process sequence can be quickly implemented in practice.
- Automatic calculation of the automation sequence based on the actual set-up data set without machine movements

» **SmartScreen**

- Partitioning of screen displays to visualize and operate two different functions simultaneously (e.g. machines and peripherals)
- Uniform design of the screen pages within the WITTMANN group
- Max. 3 containers can be addressed simultaneously for the *SmartScreen* function.
- Adjustments of set values can be effected directly in the set value profile.

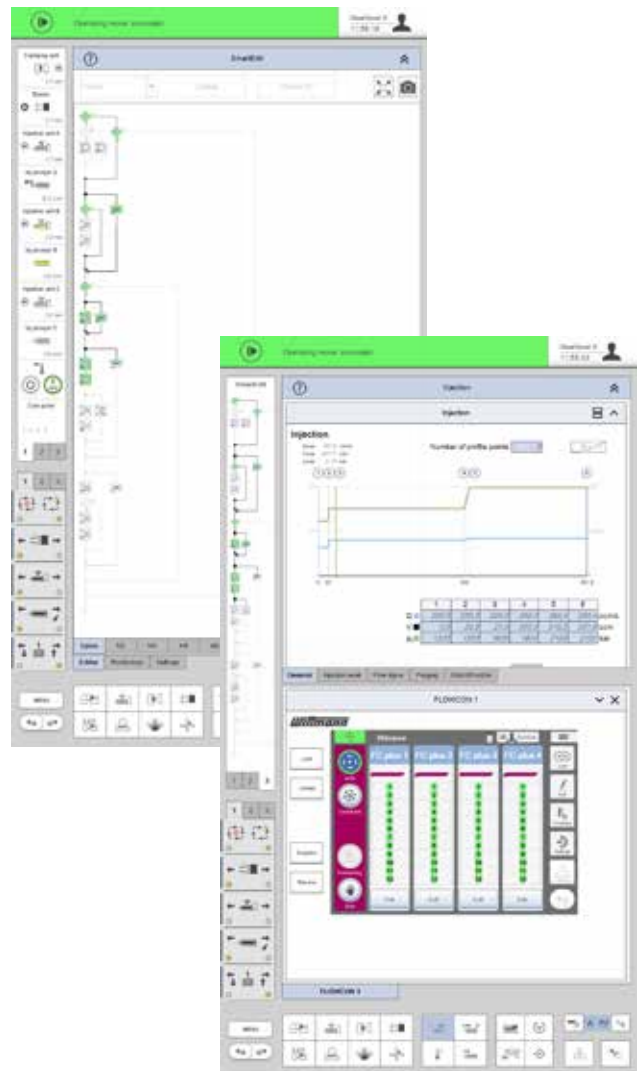

Remote communication

» **QuickLook**

- Production status check via smartphone – simple and comfortable:
- Production data and statuses of all essential appliances in a production cell
 - Complete overview of the most important production parameters
 - Access to production data, error signals and user-defined data
 - Facilities for grouping of appliances and sorting according to status available

» **Global online service network**

- Web-Service 24/7: direct Internet connection to WITTMANN BATTENFELD service
- Web-Training: efficient staff training by means of the virtual training center

WITTMANN 4.0

Communication in and with production cells


With its communication standard WITTMANN 4.0, the WITTMANN group offers a uniform data transfer platform between injection molding machines and peripheral equipment from WITTMANN. For an appliance exchange, the correct operating software is loaded automatically via an update function according to the "plug & produce" principle.

Connection of peripherals via WITTMANN 4.0

- » **WITTMANN FLOWCON plus water flow regulator, GRAVIMAX blenders and ATON dryers**
 - Units directly addressed and controlled via the machine's control system
 - Joint saving of data in the production cell, the machine and in the network via MES
- » **WITTMANN robots with R9 control system**
 - Operation of robots via the machine's monitor screen
 - High-speed communication between machine and robot to synchronize movements
 - Important machine movements can be set via the R9 robot control system
- » **WITTMANN TEMPRO plus D temperature controllers**
 - Setting and control of temperatures via the machine's control system possible
 - All functions can be operated either on the unit or via the machine's control system

Integration in MES system

The integration of machines and complete production cells in an MES system is a prerequisite for an efficient and transparent production facility according to the Industry 4.0 concept. Depending on the customer's requirements, small and medium-sized companies will be offered a compact MES solution based on TEMI+. For large-scale and globally active companies, our cooperation partner is MPDV Microlab GmbH, a leading MES service provider. With the Windows® 10 IoT operating system it is also possible to have selected status information from all connected machines on the production floor shown under SmartMonitoring on the display screen of every machine.

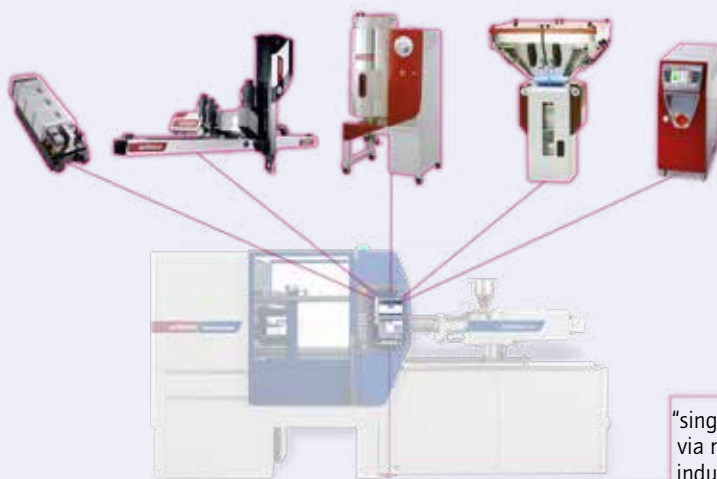

WITTMANN 4.0 system
With WITTMANN 4.0, a machine and its robots and peripherals are transformed into a uniform technical organism, which communicates externally via a specific IP address. A single point entry increases the cyber security significantly.

OPTIONS

Modular and flexible

Wittmann

Battenfeld



SmartPower

The option highlights

- » **Parallel movements**
Additional pump modules for parallel movements
 - for ejectors and core pulls
 - for higher performance (fast injection)Building-up the nozzle contact pressure during mold closing
- » **Servo-electric plasticizing**
As an alternative to the standard screw rotation drive by a hydro motor, a direct drive with a servo motor is available as an option. It reduces energy consumption and offers additional functions for parallel operation of the clamping and plasticizing units.
- » **Fast mechanical mold change**
 - Quick mold clamping systems are available as an option, ranging from a manually operated bayonet mechanism up to a magnetic plate system.
 - Fast ejector coupling
- » **Fast media connection**
For the ergonomically positioned standard connection points for cooling water, air and core-pull hydraulics, fast coupling plates (individual and system plates) are available as options, as well as power plug systems for the hot-runner heating circuits, temperature and pressure sensors, and coding signals.
- » **WITTMANN peripherals**
The comprehensive range of WITTMANN peripheral appliances offers the right solutions for all secondary processes of injection molding, including parts handling, material feeding and drying, sprue recycling and mold cooling. Via the optional WITTMANN 4.0 integration package, all additional appliances can be integrated into the production cell according to the "plug and produce" principle.

APPLICATION TECHNOLOGY

Competence above standard



Photo: Greiner Bio-One GmbH

- » **Clean-room injection molding**
Whenever medical components or electronic parts must be produced in an environment free of particles, the *SmartPower* concept with its easy-to-clean mold space provides a good starting position, which can be adapted to more stringent requirements by optional equipment modules.



Photo: Kunststoff-Institut Lüdenscheid

- » **CELLMOULD® structured foam technology**
The production of structured foam parts by targeted addition of pressurized nitrogen dioxide to the plastic melt prior to injection into the mold has been a core competence of WITTMANN BATTENFELD based on in-house R&D for more than 30 years.



- » **AIRMould® – gas injection**
AIRMould® is the process for gas-assisted injection molding developed by WITTMANN BATTENFELD. Its two variants are the AIRMould® internal gas pressure process and the external gas pressure process AIRMould® CONTOUR.



- » **COMBIMould**
When two or more plastic materials in different colors or with different attributes must be combined into one part, the *SmartPower* machines can be equipped with additional injection units in V, L, S or HH configuration and rotary tables with servo drive.



» **LIM – Liquid Injection Molding**

LIM designates the injection molding process to manufacture elastic parts from 2-component LSR (Liquid Silicon Rubber). For processing LSR products, WITTMANN BATTENFELD uses proven modular machines and automation concepts, as well as special plasticizing systems adapted to the viscosity of LSR.



» **PIM (CIM/MIM) – Powder Injection Molding**

Powder injection molding (PIM) is a manufacturing process for series production of components made of metallic or ceramic materials. PIM is the ideal production process for making complex, functional components in large batches and with stringent demands placed on the materials.



Photo: Winkelmann Powertrain Components GmbH & Co. KG

» **THERMOSET injection molding**

Thermoset materials, plastics which cross-link into irreversibly rigid networks when exposed to heat, are experiencing a comeback in a growing area of application thanks to latest material developments. WITTMANN BATTENFELD offers the appropriate equipment packages, which can also be combined with *SmartPower* machines.



» **BFMOLD® – Variothermic technology**

BFMOLD® ("Ball Filled Mold") technology enables cyclical heating and cooling of cavity areas adjacent to the contours in combination with specially adapted heating and cooling devices. The effect of this process is the elimination of sink marks and precise formation of high-gloss surfaces.

TECHNICAL DATA *SmartPower*



COMBINATIONS OF CLAMPING UNITS/INJECTION UNITS										
Clamping unit	Injection unit									
t	60	130	210	350	525	750	1000	1330	2250	3400
25	•	•	•							
35	•	•	•							
50	•	•	•	•						
60	•	•	•	•						
80	•	•	•	•	•					
90	•	•	•	•	•					
110		•	•	•	•	•				
120		•	•	•	•	•				
XL 120		•	•	•	•	•				
160					•	•	•	•		
180					•	•	•	•		
XL 180					•	•	•	•		
210						•	•	•		
240						•	•	•		
XL 240						•	•	•		
300						•	•	•	•	•
350						•	•	•	•	•
400						•	•	•	•	•

Material	Factor
ABS	0.88
CA	1.02
CAB	0.97
PA	0.91
PC	0.97
PE	0.71
PMMA	0.94
POM	1.15
PP	0.73

The maximum shotweights (g) are calculated by multiplying the theoretical shot volume (cm³) by the above factor.

Material	Factor
PP + 20 % Talc	0.85
PP + 40 % Talc	0.98
PP + 20 % GF	0.85
PS	0.91
PVC hard	1.12
PVC soft	1.02
SAN	0.88
SB	0.88
PF	1.3
UP	1.6

Dark grey boxes = thermosets


Clamping unit		SmartPower 25	SmartPower 35
Clamping force	kN	250	350
Distance between tie bars	mm x mm	320 x 270	
Mold height (min.)	mm	200	
Opening stroke/opening force	mm/kN	350/25	
Maximum daylight	mm	550	
Ejector stroke/ejector force	mm/kN	100/26,4	
Dry cycle time ¹⁾	s – mm	1.6 – 189	

Injection unit		60			130				210		
Screw diameter	mm	14	18	22	18	22	25	30	25	30	35
Screw stroke	mm	90			110	110	125	125	150		
Screw L/D ratio		20			20	20	22	22	22		
Theoretical shot volume	cm ³	13.9	22.9	34.2	28	41.8	61.4	88.4	73.6	106	144
Specific injection pressure	bar	3000	2593	1736	3000	2864	2218	1540	2940	2042	1500
Max. screw speed	min ⁻¹	436			278				310		
Max. plasticizing rate (PS) ²⁾	g/s	1.5	4.4	6.4	2.8	4.1	7.5	10.7	8.2	12	18.6
Max. screw torque	Nm	65	120	231	120	238	340	357	340	490	490
Nozzle stroke/contact force	mm/kN	250/47			250/47				250/86		
Injection rate into air	cm ³ /s	28.6	47.3	70.6	28.6	42.8	55.2	79.5	59.5	85.7	117
Injection rate into air with additional pump (option)	cm ³ /s	49	81	121	49.1	73.3	94.7	136	95	137	187
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	65	108	161	77.7	116	150	216	155	223	303
Barrel heating power	kW	2.9	5.5	6.3	5.5	6.3	9.0	10.4	9.0	10.4	10.4
Number of heating zones		4			4				4		
Energy efficiency class ³⁾		6+	5+	5+	5+	5+	5+	6+	5+	6+	7+

Drive				
Drive power	kW	7.5		11
Oil tank volume	l	170		170
Electrical power supply without/with Europackage	kVA	16/45		27/56
Emission sound pressure level ⁴⁾	dB(A)	64		64

Weights, dimensions					
Net weight (exclusive oil)	kg	2500		2600	
Length x width x height ⁵⁾	m	3.3 x 1.25 x 1.9		3.4 x 1.25 x 1.9	
Max. mold weight ⁶⁾	kg	500			
Min. mold dimension	mm x mm	196 x 196			

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

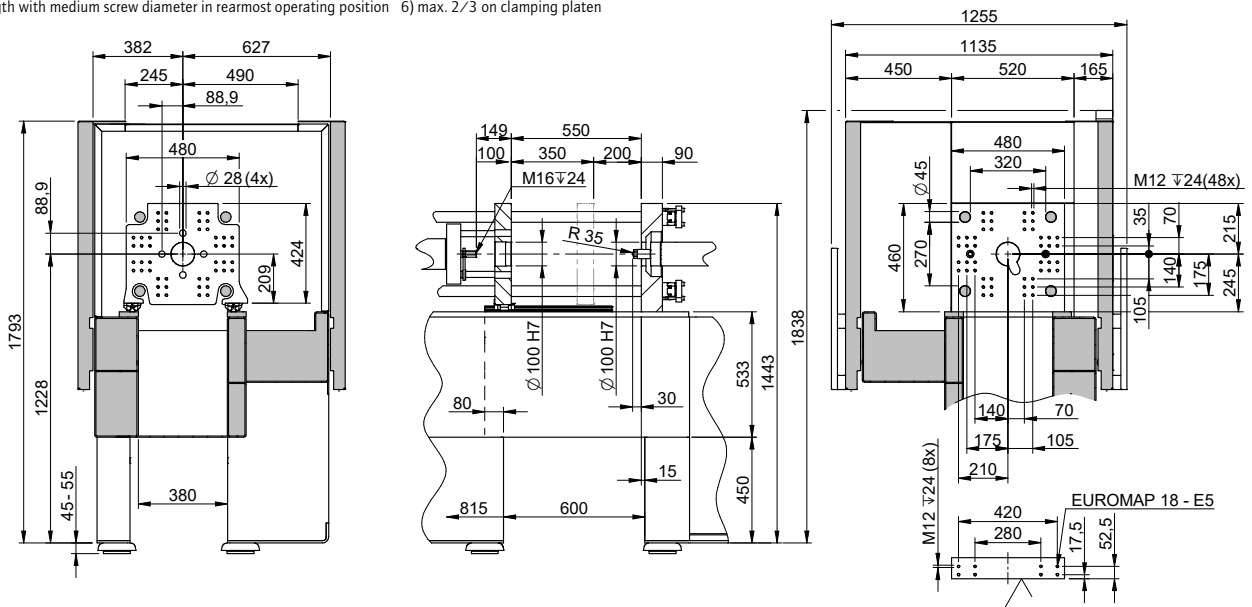

DATA SmartPower 50/60


Clamping unit		SmartPower 50	SmartPower 60
Clamping force	kN	500	600
Distance between tie bars	mm x mm	370 x 320	
Mold height (min.)	mm	200	
Opening stroke/opening force	mm/kN	400/34	
Maximum daylight	mm	600	
Ejector stroke/ejector force	mm/kN	150/26,4	
Dry cycle time ¹⁾	s – mm	1.75 – 224	

Injection unit		60			130				210			350		
Screw diameter	mm	14	18	22	18	22	25	30	25	30	35	30	35	40
Screw stroke	mm	90			110				150			175		
Screw L/D ratio		20			20				22			22		
Theoretical shot volume	cm ³	13.9	22.9	34.2	28	41.8	61.4	88.4	73.6	106	144	123	169	220
Specific injection pressure	bar	3000	2593	1736	3000	2864	2218	1540	2940	2042	1500	2835	2083	1595
Max. screw speed	min ⁻¹	623			398				310			298		
Max. plasticizing rate (PS) ²⁾	g/s	1.9	6.2	9.0	4.0	5.8	10.5	15.4	8.2	12.0	18.6	11.6	17.9	28.5
Max. screw torque	Nm	65	120	231	120	238	340	357	340	490	490	600	621	621
Nozzle stroke/contact force	mm/kN	250/47			250/47				250/86			250/86		
Injection rate into air	cm ³ /s	40.8	67.5	101	40.9	61.1	78.9	114	59.5	85.7	117	74.1	101	132
Injection rate into air with additional pump (option)	cm ³ /s	65	108	161	65	98	126	182	95	137	187	111	151	198
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	65	108	161	78	116	150	216	155	223	303	161	218	285
Barrel heating power	kW	2.9	5.5	6.3	5.5	6.3	9.0	10.4	9.0	10.4	10.4	10.4	10.4	12.9
Number of heating zones		4			4				4			4		
Energy efficiency class ³⁾		5+	5+	5+	5+	5+	5+	6+	5+	6+	7+	5+	6+	7+

Drive				
Drive power	kW	11		
Oil tank volume	l	200		
Electrical power supply without/with Europackage	kVA	20/49		
Emission sound pressure level ⁴⁾	dB(A)	64		

Weights, dimensions				
Net weight (exclusive oil)	kg	3000		
Length x width x height ⁵⁾	m	3.4 x 1.3 x 1.9		
Max. mold weight ⁶⁾	kg	700		
Min. mold dimension	mm x mm	226 x 226		

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

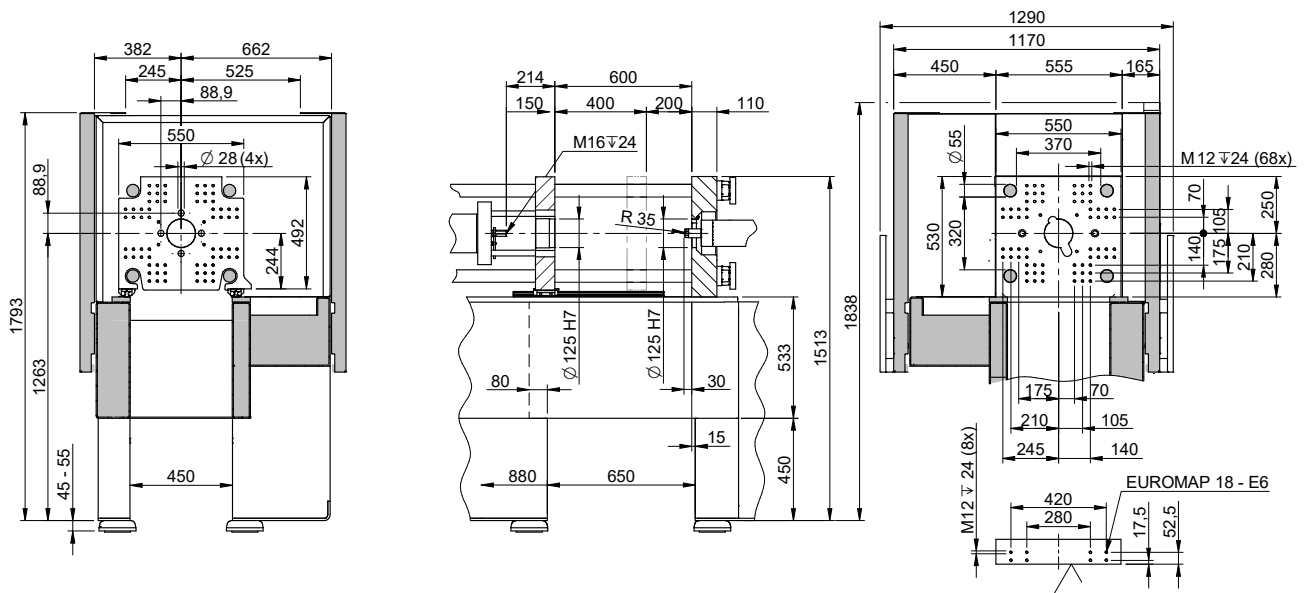


Clamping unit		SmartPower 80	SmartPower 90
Clamping force	kN	800	900
Distance between tie bars	mm x mm	470 x 420	
Mold height (min.)	mm	225	
Opening stroke/opening force	mm/kN	475/42	
Maximum daylight	mm	700	
Ejector stroke/ejector force	mm/kN	150/41.2	
Dry cycle time ¹⁾	s – mm	1.9 – 294	

Injection unit		60			130			210			350			525			
Screw diameter	mm	14	18	22	18	22	25	30	25	30	35	30	35	40	35	40	45
Screw stroke	mm	90			110			125			150			200			
Screw L/D ratio		20			20			22			22			22			
Theoretical shot volume	cm ³	13.9	22.9	34.2	28	41.8	61.4	88.4	73.6	106	144	123	169	220	193	251	318
Specific injection pressure	bar	3000	2593	1736	3000	2864	2218	1540	2940	2042	1500	2835	2083	1595	2743	2100	1659
Max. screw speed	min ⁻¹	623			477				372			298			318		
Max. plasticizing rate (PS) ²⁾	g/s	1.9	6.2	9.0	4.8	6.9	12.6	18.5	9.9	14.4	22.3	11.6	17.9	28.5	19.1	30.4	39.7
Max. screw torque	Nm	65	120	231	120	238	340	357	340	490	490	600	621	621	770		
Nozzle stroke/contact force	mm/kN	250/47			250/47				250/86			250/86			300/86		
Injection rate into air	cm ³ /s	49	81	121	49.1	73.3	94.7	136	71.4	103	140	74.1	101	132	102	133	169
Injection rate into air with additional pump (option)	cm ³ /s	65	108	161	78	116	150	216	113	163	222	117	160	209	147	192	243
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	65	108	161	78	116	150	216	155	223	303	216	294	384	223	292	369
Barrel heating power	kW	2.9	5.5	6.3	5.5	6.3	9.0	10.4	9.0	10.4	10.4	10.4	10.4	12.9	11.5	14.0	17.3
Number of heating zones		4			4				4			4			4		
Energy efficiency class ³⁾		4+	4+	4+	4+	4+	4+	5+	4+	5+	6+	5+	6+	7+	6+	7+	8+

Drive		60			130			210			350			525		
Drive power	kW	15			15			15			15			18.5		
Oil tank volume	l	280			280			280			280			280		
Electrical power supply without/with Europackage	kVA	28/57			30/59			32/61			34/63			39/68		
Emission sound pressure level ⁴⁾	dB(A)	64			64			64			64			64		

Weights, dimensions		60			130			210			350			525		
Net weight (exclusive oil)	kg	3900			4000			4100			4100			4200		
Length x width x height ⁵⁾	m	4.0 x 1.45 x 2.1			4.0 x 1.45 x 2.1			4.0 x 1.45 x 2.1			4.0 x 1.45 x 2.1			4.2 x 1.45 x 2.1		
Max. mold weight ⁶⁾	kg	900			900			900			900			900		
Min. mold dimension	mm x mm	246 x 246			246 x 246			246 x 246			246 x 246			246 x 246		

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

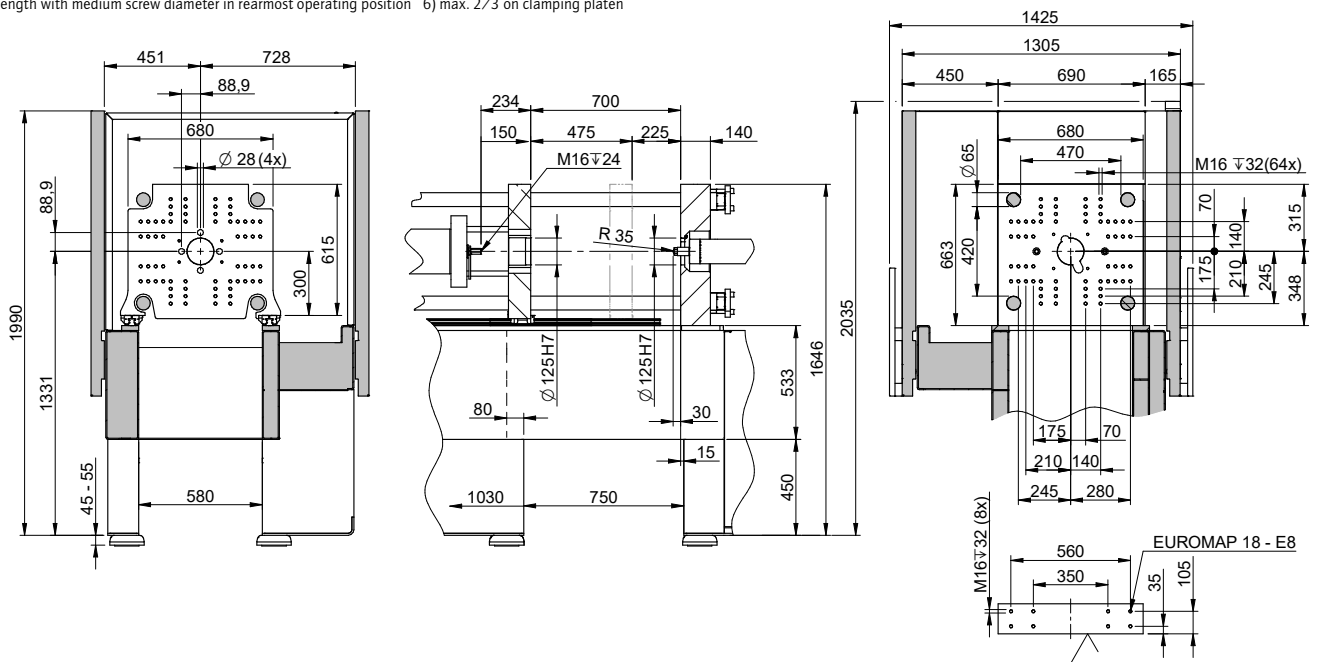

DATA SmartPower 110/120


Clamping unit		SmartPower 110			SmartPower 120		
Clamping force	kN	1100			1200		
Distance between tie bars	mm x mm	520 x 470			520 x 470		
Mold height (min.)	mm	250			250		
Opening stroke/opening force	mm/kN	550/53			550/53		
Maximum daylight	mm	800			800		
Ejector stroke/ejector force	mm/kN	150/41.2			150/41.2		
Dry cycle time ¹⁾	s – mm	2.1 – 329			2.1 – 329		

Injection unit		130				210			350			525			750		
Screw diameter	mm	18	22	25	30	25	30	35	30	35	40	35	40	45	40	45	50
Screw stroke	mm	110	110	125	125	150			175			200			225		
Screw L/D ratio		20	20	22	22	22			22			22			22		
Theoretical shot volume	cm ³	28	41.8	61.4	88.4	73.6	106	144	123	169	220	193	251	318	283	358	442
Specific injection pressure	bar	3000	2864	2218	1540	2940	2042	1500	2835	2083	1595	2743	2100	1659	2678	2116	1714
Max. screw speed	min ⁻¹	477				496			397			318			291		
Max. plasticizing rate (PS) ²⁾	g/s	4.8	6.9	12.6	18.5	13.1	19.2	29.7	15.4	23.8	38.0	19.1	30.4	39.7	27.9	36.3	43.9
Max. screw torque	Nm	120	238	340	357	340	490	490	600	621	621	770			998		
Nozzle stroke/contact force	mm/kN	250/47				250/86			250/86			300/86			350/86		
Injection rate into air	cm ³ /s	65	98	126	182	95.2	137	187	98.8	134	176	102	133	169	124	157	194
Injection rate into air with additional pump (option)	cm ³ /s	78	116	150	216	137	197	268	142	193	252	147	192	243	170	215	266
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	78	116	150	216	155	223	303	216	294	384	223	292	369	229	290	357
Barrel heating power	kW	5.5	6.3	9.0	10.4	9.0	10.4	10.4	10.4	10.4	12.9	11.5	14.0	17.3	14.0	17.3	21.9
Number of heating zones		4				4			4			4			4		
Energy efficiency class ³⁾		3+	3+	3+	3+	3+	5+	6+	5+	6+	7+	6+	7+	8+	6+	7+	8+

Drive		130		210		350		525		750	
Drive power	kW	18.5		18.5		18.5		18.5		22	
Oil tank volume	l	340		340		340		340		340	
Electrical power supply without/with Europackage	kVA	33/61		35/64		37/66		38/67		46/75	
Emission sound pressure level ⁴⁾	dB(A)	64		64		64		64		64	

Weights, dimensions		130		210		350		525		750	
Net weight (exclusive oil)	kg	4400		4500		4500		4600		4600	
Length x width x height ⁵⁾	m	4.3 x 1.5 x 2.1		4.3 x 1.5 x 2.1		4.3 x 1.5 x 2.1		4.4 x 1.5 x 2.1		4.6 x 1.5 x 2.1	
Max. mold weight ⁶⁾	kg	1100		1100		1100		1100		1100	
Min. mold dimension	mm x mm	296 x 296		296 x 296		296 x 296		296 x 296		296 x 296	

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

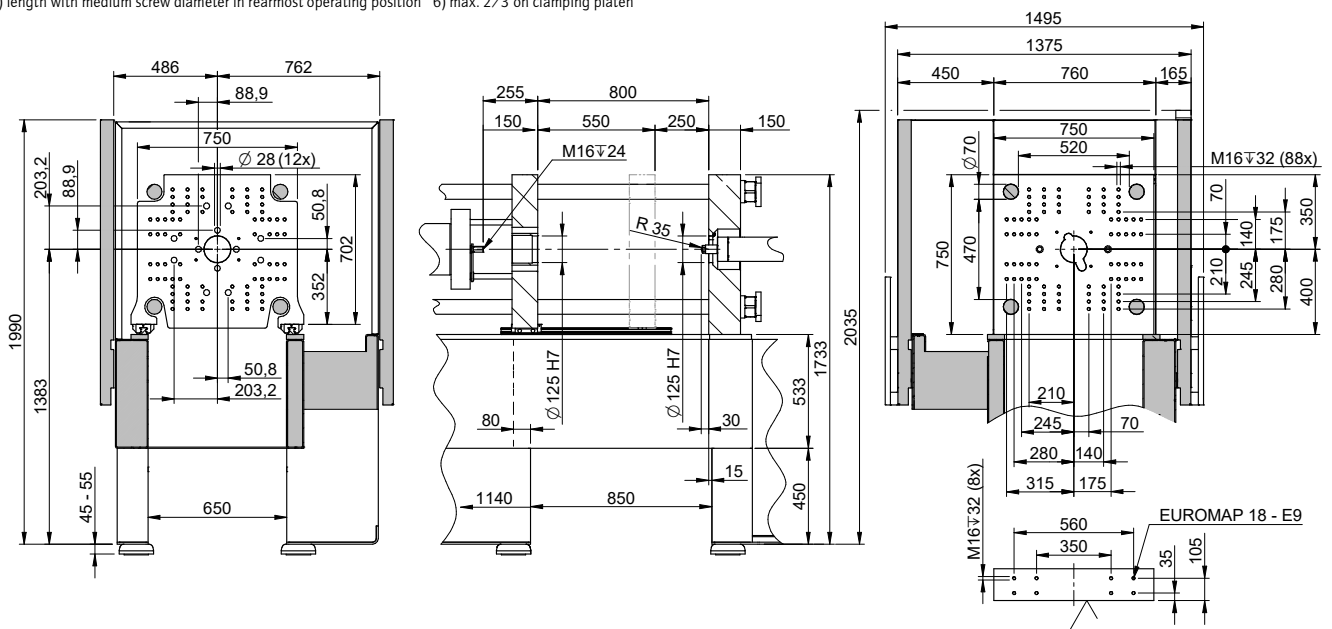


Clamping unit		SmartPower XL 120
Clamping force	kN	1200
Distance between tie bars	mm x mm	590 x 540
Mold height (min.)	mm	250
Opening stroke/opening force	mm/kN	550 / 53
Maximum daylight	mm	800
Ejector stroke/ejector force	mm/kN	150 / 41.2
Dry cycle time ¹⁾	s – mm	2.2 – 329

Injection unit		130				210			350			525			750		
Screw diameter	mm	18	22	25	30	25	30	35	30	35	40	35	40	45	40	45	50
Screw stroke	mm	110 125				150			175			200			225		
Screw L/D ratio		20 22				22			22			22			22		
Theoretical shot volume	cm ³	28	41.8	61.4	88.4	73.6	106	144	123	169	220	193	251	318	283	358	442
Specific injection pressure	bar	3000	2864	2218	1540	2940	2042	1500	2835	2083	1595	2743	2100	1659	2678	2116	1714
Max. screw speed	min ⁻¹	477				496			397			318			291		
Max. plasticizing rate (PS) ²⁾	g/s	4.8	6.9	12.6	18.5	13.1	19.2	29.7	15.4	23.8	38.0	19.1	30.4	39.7	27.9	36.3	43.9
Max. screw torque	Nm	120	238	340	357	340	490	490	600	621	621	770			998		
Nozzle stroke/contact force	mm/kN	250 / 47				250 / 86			250 / 86			300 / 86			350 / 86		
Injection rate into air	cm ³ /s	65	98	126	182	95.2	137	187	98.8	134	176	102	133	169	124	157	194
Injection rate into air with additional pump (option)	cm ³ /s	78	116	150	216	137	197	268	142	193	252	147	192	243	170	215	266
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	78	116	150	216	155	223	303	216	294	384	223	292	369	229	290	357
Barrel heating power	kW	5.5	6.3	9.0	10.4	9.0	10.4	10.4	10.4	10.4	12.9	11.5	14.0	17.3	14.0	17.3	21.9
Number of heating zones		4				4			4			4			4	4	5
Energy efficiency class ³⁾		3+				3+	5+	6+	5+	6+	7+	6+	7+	8+	6+	7+	8+

Drive						
Drive power	kW	18.5	18.5	18.5	18.5	22
Oil tank volume	l	370	370	370	370	370
Electrical power supply without/with Europackage	kVA	33 / 61	35 / 64	37 / 66	38 / 67	46 / 75
Emission sound pressure level ⁴⁾	dB(A)	64	64	64	64	64

Weights, dimensions						
Net weight (exclusive oil)	kg	5400	5500	5500	5600	5600
Length x width x height ⁵⁾	m	4.3 x 1.65 x 2.1	4.3 x 1.65 x 2.1	4.3 x 1.65 x 2.1	4.4 x 1.65 x 2.1	4.6 x 1.65 x 2.1
Max. mold weight ⁶⁾	kg	1800				
Min. mold dimension	mm x mm	346 x 346				

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

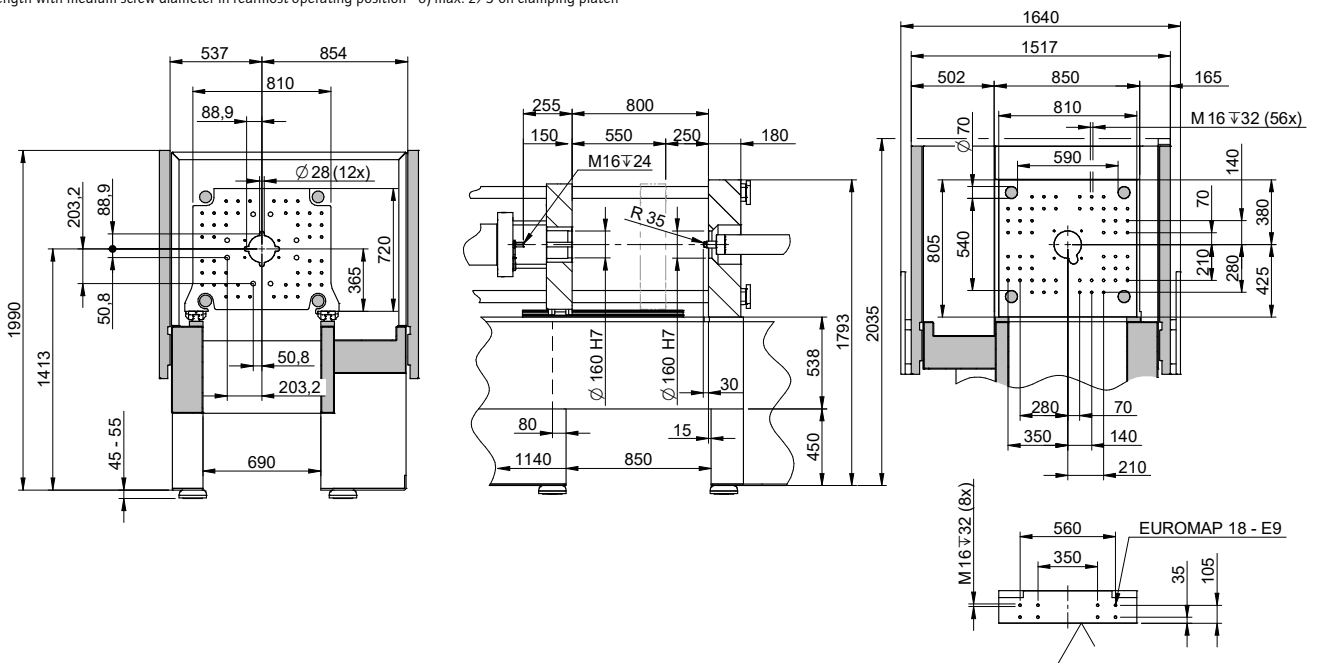

DATA SmartPower 160/180


Clamping unit		SmartPower 160			SmartPower 180		
Clamping force	kN	1600			1800		
Distance between tie bars	mm x mm	570 x 520					
Mold height (min.)	mm	300					
Opening stroke/opening force	mm/kN	650/81					
Maximum daylight	mm	950					
Ejector stroke/ejector force	mm/kN	200/65					
Dry cycle time ¹⁾	s – mm	2.4 – 364					

Injection unit		525			750			1000			1330		
Screw diameter	mm	35	40	45	40	45	50	45	50	55	50	55	65
Screw stroke	mm	200			225			250			275		
Screw L/D ratio		22			22			22			22		
Theoretical shot volume	cm ³	193	251	318	283	358	442	398	491	594	540	653	913
Specific injection pressure	bar	2743	2100	1659	2678	2116	1714	2490	2016	1666	2470	2041	1461
Max. screw speed	min ⁻¹	516			398			260			278		
Max. plasticizing rate (PS) ²⁾	g/s	30	47	63	38	49	60	32	39	48	42	52	62
Max. screw torque	Nm	770			998			1540			1940		
Nozzle stroke/contact force	mm/kN	300/86			350/86			400/100			400/100		
Injection rate into air	cm ³ /s	166	217	274	170	215	265	183	226	273	248	300	419
Injection rate into air with additional pump (option)	cm ³ /s	223	292	369	248	314	388	267	330	399	333	403	563
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	287	375	475	376	476	588	478	590	714	567	686	958
Barrel heating power	kW	11.5	14.0	17.3	14.0	17.3	21.9	17.3	21.9	24.2	21.9	24.2	27.0
Number of heating zones		4			4			5			5		
Energy efficiency class ³⁾		5+	6+	7+	6+	7+	8+	6+	7+	8+	7+	7+	8+

Drive		525			750			1000			1330		
Drive power	kW	30			30			30			37		
Oil tank volume	l	450			450			450			450		
Electrical power supply without/with Europackage	kVA	52/81			55/84			57/86			67/96		
Emission sound pressure level ⁴⁾	dB(A)	65			65			65			65		

Weights, dimensions		525			750			1000			1330		
Net weight (exclusive oil)	kg	7300			7300			8000			8000		
Length x width x height ⁵⁾	m	4.8 x 1.65 x 2.1			5.0 x 1.65 x 2.1			5.3 x 1.65 x 2.1			5.5 x 1.65 x 2.1		
Max. mold weight ⁶⁾	kg	2000											
Min. mold dimension	mm x mm	346 x 346											

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

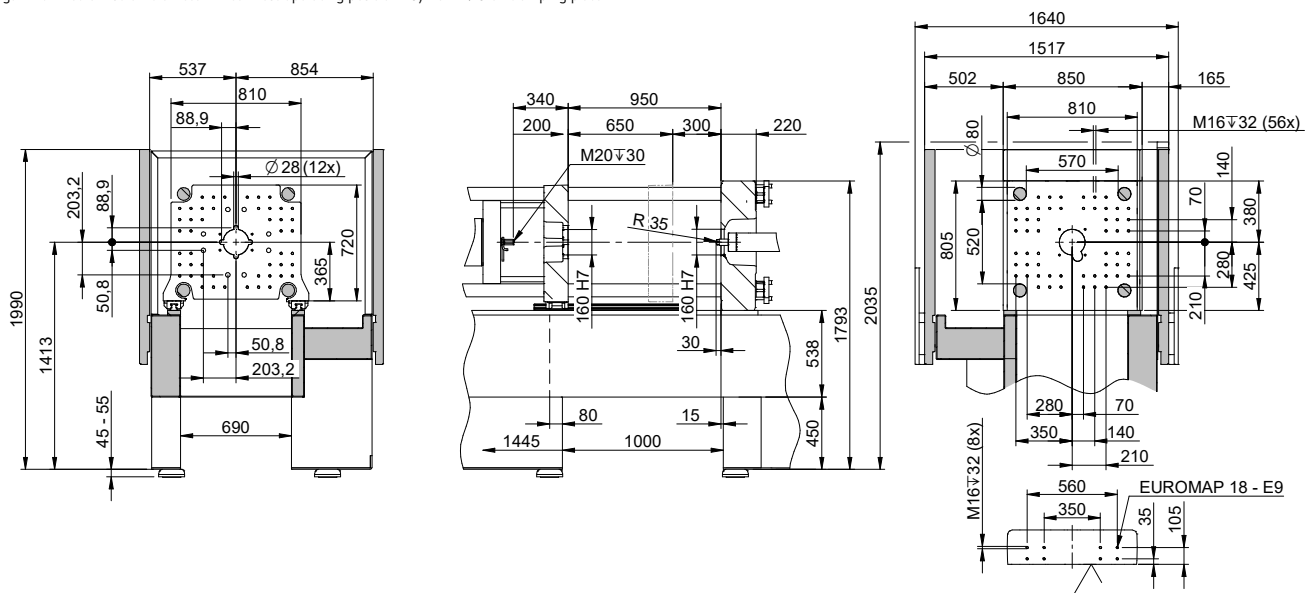


Clamping unit		SmartPower XL 180	
Clamping force	kN	1800	
Distance between tie bars	mm x mm	710 x 660	
Mold height (min.)	mm	300	
Opening stroke/opening force	mm/kN	650 / 81	
Maximum daylight	mm	950	
Ejector stroke/ejector force	mm/kN	200 / 65	
Dry cycle time ¹⁾	s – mm	2.5 – 364	

Injection unit		525			750			1000			1330		
Screw diameter	mm	35	40	45	40	45	50	45	50	55	50	55	65
Screw stroke	mm	200			225			250			275		
Screw L/D ratio		22			22			22			22		
Theoretical shot volume	cm ³	193	251	318	283	358	442	398	491	594	540	653	913
Specific injection pressure	bar	2743	2100	1659	2678	2116	1714	2490	2016	1666	2470	2041	1461
Max. screw speed	min ⁻¹	516			398			260			278		
Max. plasticizing rate (PS) ²⁾	g/s	30	47	63	38	49	60	32	39	48	42	52	62
Max. screw torque	Nm	770			998			1540			1940		
Nozzle stroke/contact force	mm/kN	300 / 86			350 / 86			400 / 100			400 / 100		
Injection rate into air	cm ³ /s	166	217	274	170	215	265	183	226	273	248	300	419
Injection rate into air with additional pump (option)	cm ³ /s	223	292	369	248	314	388	267	330	399	333	403	563
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	287	375	475	376	476	588	478	590	714	567	686	958
Barrel heating power	kW	11.5	14.0	17.3	14.0	17.3	21.9	17.3	21.9	24.2	21.9	24.2	27.0
Number of heating zones		4			4			5			5		
Energy efficiency class ³⁾		5+	6+	7+	6+	7+	8+	6+	7+	8+	7+	7+	8+

Drive						
Drive power	kW	30			37	
Oil tank volume	l	490			490	
Electrical power supply without/with Europackage	kVA	52 / 81			57 / 86	67 / 96
Emission sound pressure level ⁴⁾	dB(A)	65			65	65

Weights, dimensions							
Net weight (exclusive oil)	kg	7800			7800	9500	9500
Length x width x height ⁵⁾	m	4.8 x 1.8 x 2.3			5.0 x 1.8 x 2.3	5.3 x 1.8 x 2.3	5.5 x 1.8 x 2.3
Max. mold weight ⁶⁾	kg	2700					
Min. mold dimension	mm x mm	396 x 396					

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

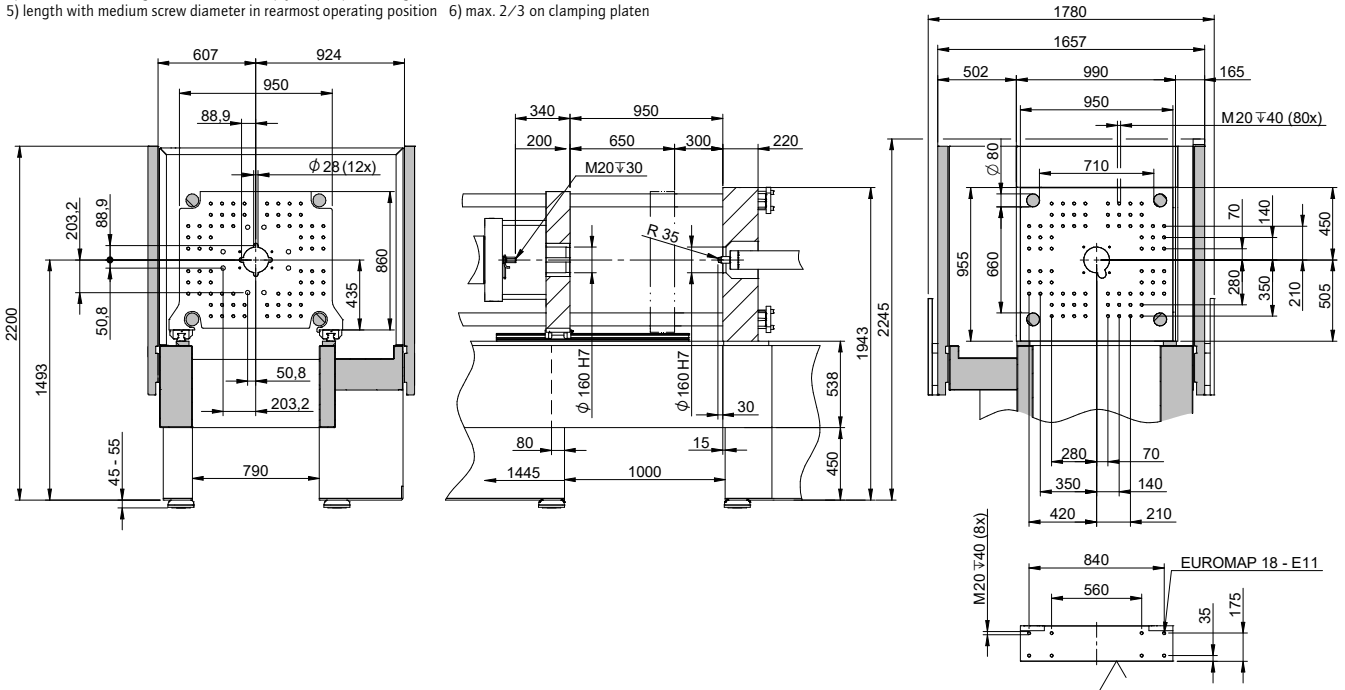

DATA SmartPower 210/240


Clamping unit		SmartPower 210	SmartPower 240
Clamping force	kN	2100	2400
Distance between tie bars	mm x mm	670 x 620	
Mold height (min.)	mm	350	
Opening stroke/opening force	mm/kN	750/100	
Maximum daylight	mm	1100	
Ejector stroke/ejector force	mm/kN	200/65	
Dry cycle time ¹⁾	s – mm	2.6 – 434	

Injection unit		750			1000			1330		
Screw diameter	mm	40	45	50	45	50	55	50	55	65
Screw stroke	mm	225			250			275		
Screw L/D ratio		22			22			22		
Theoretical shot volume	cm ³	283	358	442	398	491	594	540	653	913
Specific injection pressure	bar	2678	2116	1714	2490	2016	1666	2470	2041	1461
Max. screw speed	min ⁻¹	398			350			278		
Max. plasticizing rate (PS) ²⁾	g/s	38	49	60	44	53	65	42	52	62
Max. screw torque	Nm	998			1540			1940		
Nozzle stroke/contact force	mm/kN	350/86			400/100			400/100		
Injection rate into air	cm ³ /s	229	289	357	246	304	368	248	300	419
Injection rate into air with additional pump (option)	cm ³ /s	307	389	480	330	408	494	333	403	563
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	376	476	588	478	590	714	567	686	958
Barrel heating power	kW	14.0	17.3	21.9	17.3	21.9	24.2	21.9	24.2	27.0
Number of heating zones		4	4	5	4	5	5	5	5	5
Energy efficiency class ³⁾		5+	6+	7+	6+	7+	8+	7+	7+	8+

Drive				
Drive power	kW	37		37
Oil tank volume	l	600		600
Electrical power supply without/with Europackage	kVA	62/91		64/93
Emission sound pressure level ⁴⁾	dB(A)	65		65

Weights, dimensions				
Net weight (exclusive oil)	kg	10800		11500
Length x width x height ⁵⁾	m	5.6 x 1.8 x 2.3		5.6 x 1.8 x 2.3
Max. mold weight ⁶⁾	kg	3000		
Min. mold dimension	mm x mm	396 x 396		

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

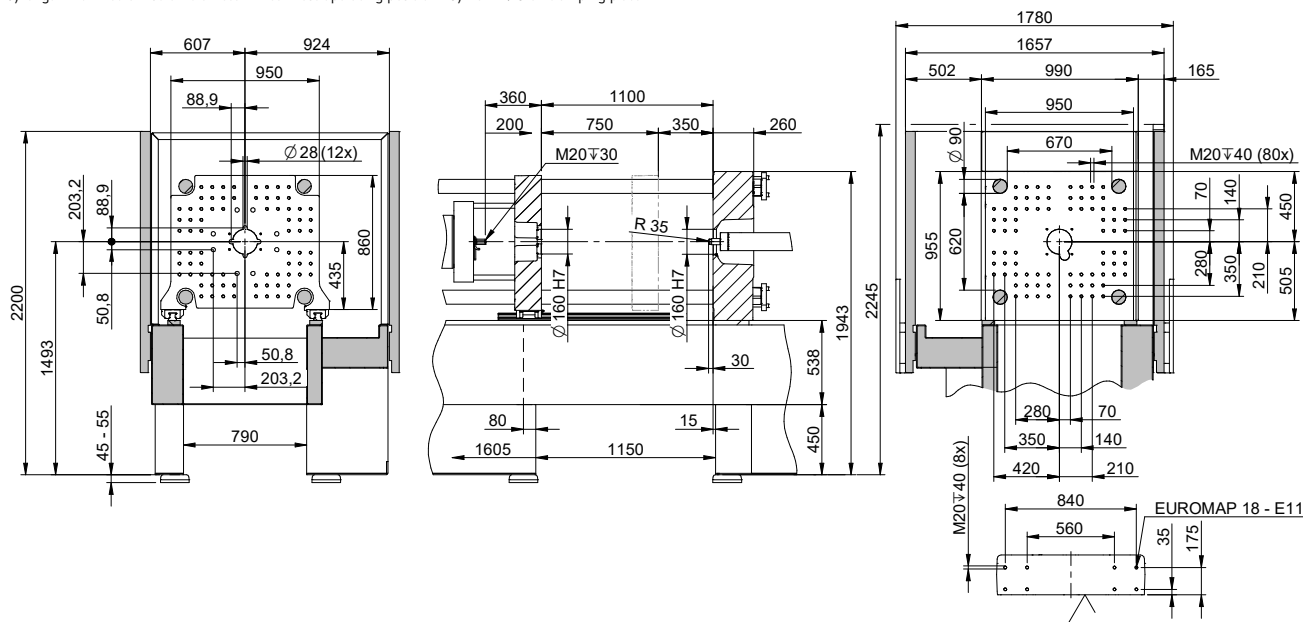


Clamping unit		SmartPower XL 240	
Clamping force	kN	2400	
Distance between tie bars	mm x mm	850 x 770	
Mold height (min.)	mm	350	
Opening stroke/opening force	mm/kN	750 / 100	
Maximum daylight	mm	1100	
Ejector stroke/ejector force	mm/kN	200 / 65	
Dry cycle time ¹⁾	s – mm	2.7 – 434	

Injection unit		750			1000			1330		
Screw diameter	mm	40	45	50	45	50	55	50	55	65
Screw stroke	mm	225			250			275		
Screw L/D ratio		22			22			22		
Theoretical shot volume	cm ³	283	358	442	398	491	594	540	653	913
Specific injection pressure	bar	2678	2116	1714	2490	2016	1666	2470	2041	1461
Max. screw speed	min ⁻¹	398			350			278		
Max. plasticizing rate (PS) ²⁾	g/s	38	49	60	44	53	65	42	52	62
Max. screw torque	Nm	998			1540			1940		
Nozzle stroke/contact force	mm/kN	350 / 86			400 / 100			400 / 100		
Injection rate into air	cm ³ /s	229	289	357	246	304	368	248	300	419
Injection rate into air with additional pump (option)	cm ³ /s	307	389	480	330	408	494	333	403	563
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	376	476	588	478	590	714	567	686	958
Barrel heating power	kW	14.0	17.3	21.9	17.3	21.9	24.2	21.9	24.2	27.0
Number of heating zones		4	4	5	4	5	5	5		
Energy efficiency class ³⁾		5+	6+	7+	6+	7+	8+	7+	7+	8+

Drive							
Drive power	kW	37		37		37	
Oil tank volume	l	650		650		650	
Electrical power supply without/with Europackage	kVA	62 / 91		64 / 93		67 / 96	
Emission sound pressure level ⁴⁾	dB(A)	65		65		65	

Weights, dimensions							
Net weight (exclusive oil)	kg	12800		13500		13500	
Length x width x height ⁵⁾	m	5.6 x 1.95 x 2.5		5.6 x 1.95 x 2.5		5.8 x 1.95 x 2.5	
Max. mold weight ⁶⁾	kg	3700					
Min. mold dimension	mm x mm	446 x 446					

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

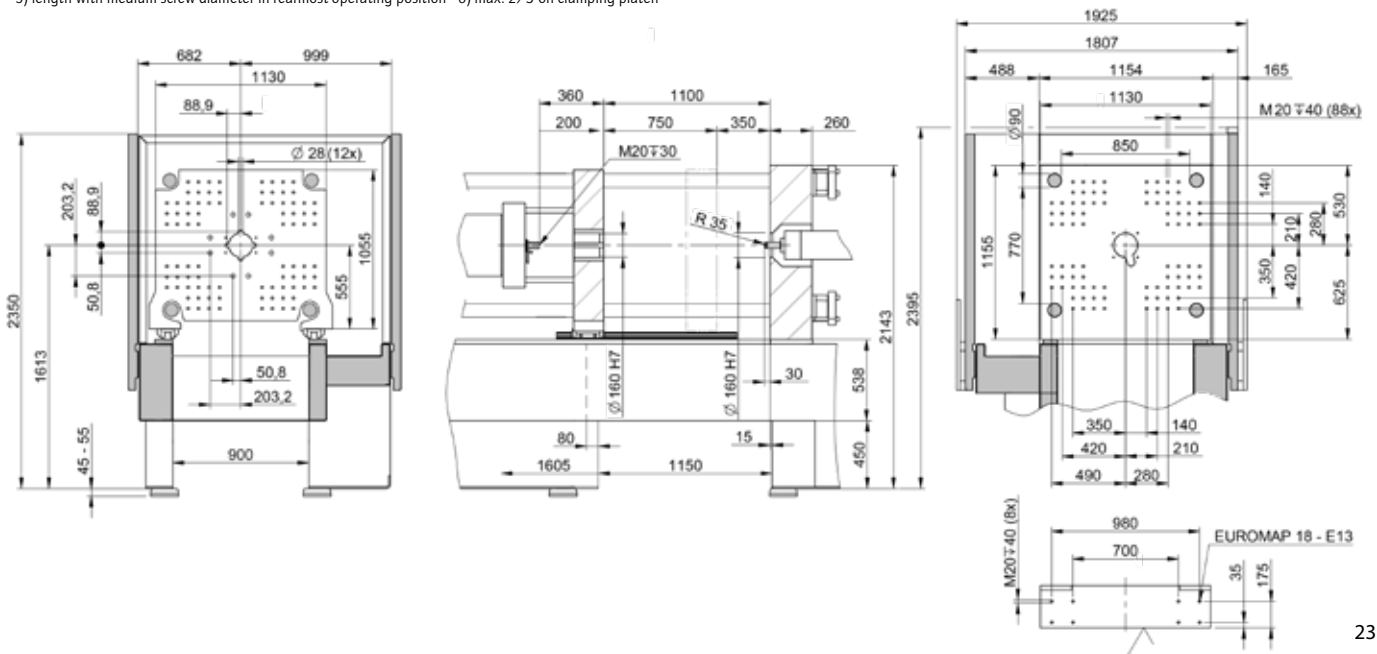

DATA SmartPower 300/350


Clamping unit		SmartPower 300	SmartPower 350
Clamping force	kN	3000	3500
Distance between tie bars	mm x mm	800 x 720	
Mold height (min.)	mm	400	
Opening stroke/opening force	mm/kN	850/136	
Maximum daylight	mm	1250	
Ejector stroke/ejector force	mm/kN	250/81	
Dry cycle time ¹⁾	s – mm	2.8 – 504	

Injection unit		750			1000			1330			2250			3400		
Screw diameter	mm	40	45	50	45	50	55	50	55	65	55	65	75	65	75	85
Screw stroke	mm	225			250			275			325			375		
Screw L/D ratio		22			22			22			22			22		
Theoretical shot volume	cm ³	283	358	442	398	491	594	540	653	913	772	1078	1436	1244	1657	2128
Specific injection pressure	bar	2678	2116	1714	2490	2016	1666	2470	2041	1461	2500	2070	1555	2500	2022	1574
Max. screw speed	min ⁻¹	398			350			278			255			177		
Max. plasticizing rate (PS) ²⁾	g/s	38	49	60	44	53	65	42	52	62	48	71	108	50	76	107
Max. screw torque	Nm	998			1540			1940			2500 2625 2625			3000 3780 3780		
Nozzle stroke/contact force	mm/kN	350/86			400/100			400/100			550/129			550/129		
Injection rate into air	cm ³ /s	229	289	357	246	304	368	248	300	419	242	338	450	260	346	445
Injection rate into air with additional pump (option)	cm ³ /s	307	389	480	330	408	494	333	403	563	315	440	585	338	450	578
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	376	476	588	478	590	714	567	686	958	726	1014	1351	1040	1385	1779
Barrel heating power	kW	14.0	17.3	21.9	17.3	21.9	24.2	21.9	24.2	27.0	22.7	26.4	32.7	26.4	32.7	37.3
Number of heating zones		4	4	5	4	5	5	5			6			6		
Energy efficiency class ³⁾		5+	6+	7+	6+	7+	7+	6+	7+	8+	7+	8+	8+	8+	8+	9+

Drive		750			1000			1330			2250			3400		
Drive power	kW	45			45			45			45			45		
Oil tank volume	l	750			750			750			750			750		
Electrical power supply without/with Europackage	kVA	72/101			75/104			78/107			88/117			93/122		
Emission sound pressure level ⁴⁾	dB(A)	65			65			65			65			65		

Weights, dimensions		750			1000			1330			2250			3400		
Net weight (exclusive oil)	kg	13800			14500			14500			16500			17500		
Length x width x height ⁵⁾	m	6.0 x 1.95 x 2.5			6.0 x 1.95 x 2.5			6.2 x 1.95 x 2.5			7.2 x 1.95 x 2.5			7.4 x 1.95 x 2.5		
Max. mold weight ⁶⁾	kg	4000			4000			4000			4000			4000		
Min. mold dimension	mm x mm	446 x 446			446 x 446			446 x 446			446 x 446			446 x 446		

- 1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

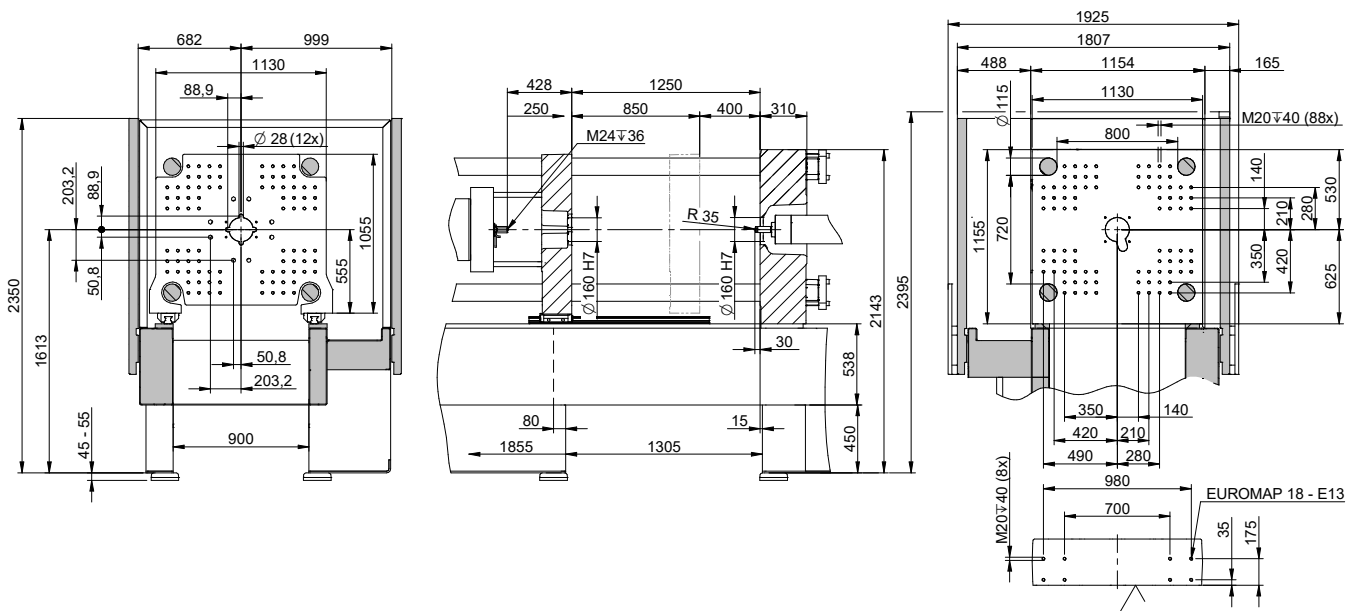


Clamping unit		SmartPower 400
Clamping force	kN	4000
Distance between tie bars	mm x mm	800 x 720
Mold height (min.)	mm	400
Opening stroke/opening force	mm/kN	950 / 136
Maximum daylight	mm	1350
Ejector stroke/ejector force	mm/kN	250 / 81
Dry cycle time ¹⁾	s – mm	3.0 – 504

Injection unit		750			1000			1330			2250			3400		
Screw diameter	mm	40	45	50	45	50	55	50	55	65	55	65	75	65	75	85
Screw stroke	mm	225			250			275			325			375		
Screw L/D ratio		22			22			22			22			22		
Theoretical shot volume	cm ³	283	358	442	398	491	594	540	653	913	772	1078	1436	1244	1657	2128
Specific injection pressure	bar	2678	2116	1714	2490	2016	1666	2470	2041	1461	2500	2070	1555	2500	2022	1574
Max. screw speed	min ⁻¹	398			350			278			255			177		
Max. plasticizing rate (PS) ²⁾	g/s	38	49	60	44	53	65	42	52	62	48	71	108	50	76	107
Max. screw torque	Nm	998			1540			1940			2500			3000		
Nozzle stroke/contact force	mm/kN	350 / 86			400 / 100			400 / 100			550 / 129			550 / 129		
Injection rate into air	cm ³ /s	229	289	357	246	304	368	248	300	419	242	338	450	260	346	445
Injection rate into air with additional pump (option)	cm ³ /s	307	389	480	330	408	494	333	403	563	315	440	585	338	450	578
Injection rate into air with hydraulic accumulator (option)	cm ³ /s	376	476	588	478	590	714	567	686	958	726	1014	1351	1040	1385	1779
Barrel heating power	kW	14.0	17.3	21.9	17.7	21.9	24.2	21.9	24.2	27.0	22.7	26.4	32.7	26.4	32.7	37.3
Number of heating zones		4	4	5	4	5	5	5			6			6		
Energy efficiency class ³⁾		5+	6+	7+	6+	7+	7+	6+	7+	8+	7+	8+	8+	8+	8+	9+

Drive		750			1000			1330			2250			3400		
Drive power	kW	45			45			45			45			45		
Oil tank volume	l	750			750			750			750			750		
Electrical power supply without/with Europackage	kVA	72 / 101			75 / 104			78 / 107			88 / 117			93 / 122		
Emission sound pressure level ⁴⁾	dB(A)	65			65			65			65			65		

Weights, dimensions		750			1000			1330			2250			3400		
Net weight (exclusive oil)	kg	14800			15500			15500			17500			18500		
Length x width x height ⁵⁾	m	6.2 x 1.95 x 2.5			6.2 x 1.95 x 2.5			6.4 x 1.95 x 2.5			7.4 x 1.95 x 2.5			7.6 x 1.95 x 2.5		
Max. mold weight ⁶⁾	kg	4000														
Min. mold dimension	mm x mm	496 x 496														

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

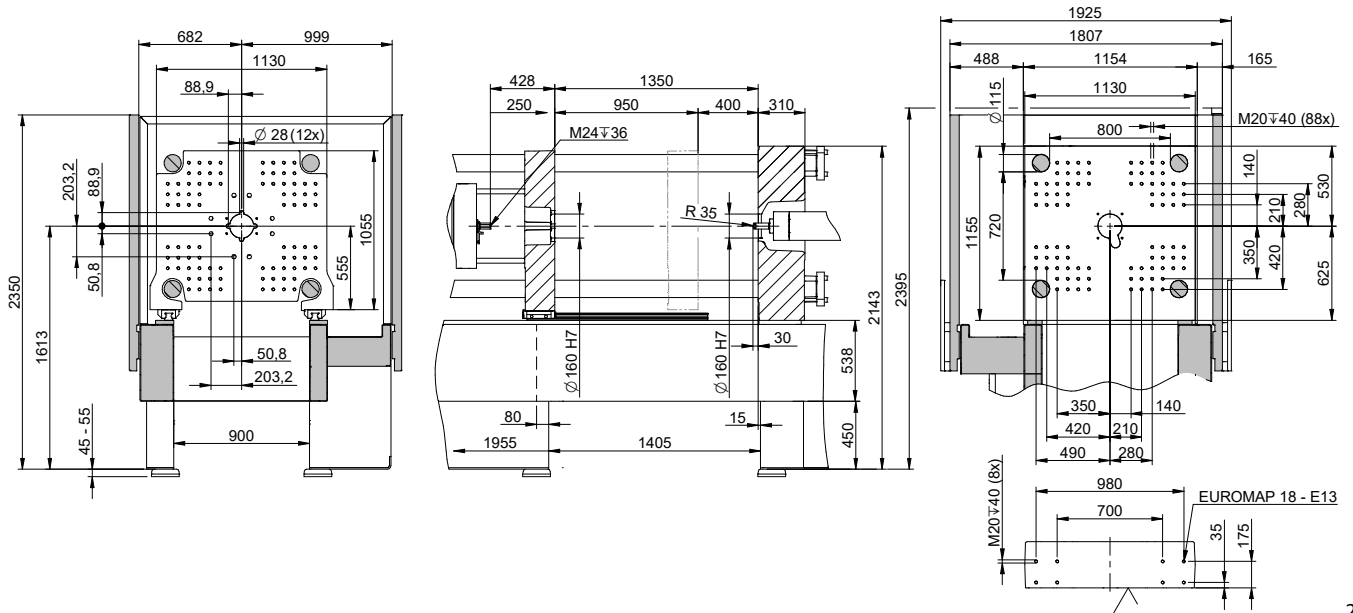

STANDARD

Base machine

Drop – voltage 230/400 V/3p+N-TN/TT, 50 Hz
Painting RAL 7047 tele grey 4 / RAL 5002 ultramarine blue
Air cooling system for drive unit, water cooling for feeding zone and oil cooler with solenoid valve
One-piece base frame with 3 disposal directions
Ejection area – coverage of ejection area according to EN201
Test-run with hydraulic oil HLP32 zinc free according to DIN 51524 T2 / purity level 17/15/12 according to ISO 4406 (Attention: oils is not included in delivery), lubricants according to H2-quality
Printed operating manual incl. user manual on USB flash drive in any EU language acc. to definition of country incl. type examination certificate TÜV Austria in German incl. protocol: electrical safety acc. to EN 60204-1
Injection moulding machine according to machinery directive 2006/42/EG incl. declaration of conformity and CE-marking

Hydraulics

Drive unit S0 with speed controlled servo motor for hydraulic pump to increase the energy efficiency
Hydraulics with oil cooler controlled in water inlet of cooling, oil level Monitoring, oil filtration with electrical clogging indicator
Oil preheating of hydraulic drive

Clamping unit

Clamping force and closing and opening forces adjustable
Mold safety program
Moving platen supported by positioned linear guides
Mold platen according to EUROMAP 2, clamping surface metallic bright, rest painted
Fixing holes for robot on fixed platen as per EUROMAP 18
Hydraulic multi stroke ejector
Clamping cylinder plunger induction hardened & hard chrome-plated, ejector piston hard chrome-plated, position sensor with linear potentiometer

Injection unit

Hydraulic screw drive
Injection axis/nozzle carriage – injection, holding and back pressure controlled with defined nozzle carriage pressure
Plasticizing unit: screw in nitrated steel & barrel in AK+ for processing thermoplastics, w/o grooves, standard nozzle head, 3 zone universal screw, quick acting check valve (3 parts), heater bands up to 350 °C w/o insul.
Thermocouple failure monitor
Maximum temperature supervision
Plug-in ceramic heater bands
Temperature control of feed throat integrated
Swivelling injection unit
Injection cylinder piston rod hard chrome-plated and linear guides in standard design, position sensor with linear potentiometer
Selectable barrel stand-by temperature
Decompression before and/or after metering
Physical units – bar, ccm, mm/s etc.
Screw protection
Peripheral screw speed indication
Linear interpolation of holding pressure set values
Bar chart for barrel temperature with set value and actual value display
Selectable injection pressure limitation
Changeover from injection to holding pressure depending on stroke, time and pressure
Open nozzle R35
Splash guard and barrel covering in standard execution according to EN 201, L/D 22 protected via limit switch
Material hopper 6 litres (MH206) for automatical material feed, sliding device with shut-off function for material with sliding guide

Safety gate

Covering injection side – maintenance door screwed together
Safety gate in standard execution, acrylic glass light-blue 309 / frame RAL 5002
Safety gate at operator and non-operator side manually operated

Electrics

Control zone for nozzle heater band 230 V
ambiLED-status indicator
Fuse protection for sockets
Switch cabinet cooling – circulation fan for environment temperature to 30 °C
Emergency stop switch button
Printer socket
USB – 1 x operating unit
1 Ethernet interface (switch cabinet)
Printer via USB connection or network

Control system

Control system UNILOG B8 – 21,5" multi-touch screen (full HD)
Control panel with selectable haptic keys
Software for operating hours counter
Closing/Opening – 5 profile steps
Ejection forward/back – 3 profile steps
Nozzle forward/back – 3 profile steps
Injection/Holding pressure – 10 profile steps
Screw speed/Back pressure – 6 profile steps
Parts counter with good/bad part evaluation
Purging program through open mold
Stroke zero offset settings
Start-up program
Switchover to holding pressure MASTER/SLAVE by injection time, screw stroke/injection volume and injection pressure
Self-teaching temperature controller
Display of temperature inside electrical cabinet
Seven-day timer
Access authorization via USB interface, password system and RFID authorization system (1 x check card IT-level-15, 1 x token customer level-30 and 1 x token customer service level-20 are included in delivery)
Freely configurable status bar
Physical, process-related units
Automatic dimming
Logbook with filter function
User programming system (APS)
Userpage
Note pad function
Cycle time analysis
Hardcopy function
Internal data storage via USB connection or network
Online language selection
Online selection of imperial or metric units
Time monitoring
BASIC Quality Monitoring (1 freely configurable network connection, quality table with 1000 storage depth, events protocol (logbook) for 1000 events, actual value graphics with 5 curves, 1 envelope curves monitoring)
Injection integral supervision
Metering integral supervision
Alarm message via e-mail
SmartEdit – sequence editor
QuickSetup – assistance program for initial parameter setting
Energy consumption monitoring for motors and heating

Base machine
Regional packages, country-specific
Drop 1, special voltage, drop 2
Handling package with open machine safety gate on non operator side
Parts hopper
Parts chute for separation of good/bad parts or photoelectric ejection check
Hydraulics/Pneumatics
Drive unit with speed controlled servo motor for hydraulic pump incl. additional pump for core pull movement, parallel ejection and fast injection
Drive unit with speed controlled servo motor for hydraulic pump incl. additional pump for core pull movement, parallel ejection and fast injection via hydraulic accumulator parallel to clamp force build-up
Hydraulics with increased oil cooler
Raw filter in water inlet of cooling incl. adapter with ball valve for oil maintenance on oil tank
Hydraulic core pull for clamping plate, interface according to EUROMAP 13, incl. or without core pull pressure release
Pneum. core pull on clamping plate/nozzle plate, incl. pressure regulator
Hydraulic manifolds for one mold shut-off nozzle or more
Air valves on nozzle plate/clamping plate
Compressed air pressure maintenance unit incl. 1 or more way pressure regulation incl. directional exhaust valve with blocking function
Clamping unit
Mold platen according to SPI, JIS, T-slots
Mold platen incl. cooling channels
Mold platen chemically nickel-plated
Manuel tie-bar retract device
Hydraulic ejector in reinforced execution
Unscrewing device in lieu of ejector
Double check valve to keep ejector in end-position
Ejector cross according to EUROMAP/SPI
Mechanical or pneumatic ejector coupling
Ejector platen safety
Mechanical mold safety mechanism
Injection unit
High torque hydraulic screw drive/High revolution hydraulic screw drive
Screw drive by servo motor for parallel recovery
Injection, holding and back pressure controlled via servo valve
Injection active closed loop, holding and back pressure controlled via servo valve
Check valve to hold screw in position after end of dosing
Corrosion resistance injection unit
Plasticizing unit AK+ in wear and corrosion resistant execution
Plasticizing unit AK++ in high wear and corrosion resistant execution
Plasticizing unit AKCN in wear and corrosion resistant execution, for processing PMMA and ABS
Plasticizing unit AKTN in wear and corrosion resistant execution, for processing PC
Grooves in the feeding zone
Barrier section, screw with mixing section
Ball type screw tip
Melt pressure transducer, melt temperature sensor
Heater bands up to 450 °C
Plasticizing unit in special execution for LIM, MIM, CIM, thermoset, PVC
Barrel insulation
Open nozzles in special execution
Needle type shut-off nozzle operated with spring, pneumatically or hydraulically
Barrel covering and splash guard in special execution
Vacuum package incl. vacuum pump
Material hopper in special execution
Hopper magnet

Safety gate
Safety gate clamping side, rear side and/or operator side elevated, lowered or extended
Insider package WITTMANN rear side incl. conveyor belt
Safety gate clamping side electrically operated
Front side gate safety system for manual part removal incl. clearance of ejector
Cooling and conditioning
Cooling water distributor with/without blow-off valve
Solenoid valve for cooling water distributor
Machine cooling by T-piece in inlet pipe
Filter back flushable/water pressure supervision in inlet pipe
Distributor block on nozzle plate/clamping plate
Electrics
Temperature control zones for hot runner
Acoustic element integrated in signal lamp
Socket combination
Additional fan in electric switch cabinet for increased environment temperature
Cabinet air conditioner
Additional emergency stop switch button
Interface for robot, conveyor belt, TCU, dosing unit, AIRMOULD®, BFMOLD®, mold surveillance, production data logging system, RJG eDart, Priamus BlueLine, danger zone boundary, ejection in mold middle plate, brushing device, relay signals
Control system
Cavity pressure switchover
BNC sockets for injection process analysis
EXPERT Quality Monitoring (4 freely configurable network connections, quality table with 10000 storage depth, events protocol (logbook) for 10000 events, actual value graphic with 16 curves, 4 envelope curves monitoring, SPC charts, trend diagrams)
Mold identification
Special programs on customer request
HiQ-Cushion – melt cushion control
HiQ-Flow – injection integral control
HiQ-Melt – monitoring of material quality
HiQ-Metering – active closing of the check valve
Software Tandemmould, multiple data sets
Energy consumption analysis
Clamp force supervision
Injection compression and venting program
Initiation of next cycle by closing safety gate
Special program ejector intermediate stop/ejection of cold slug
Additional output card/input card, freely programmable
Integration package WITTMANN 4.0
Additional equipment
Plinth for robot
Tool kit
Levelling pads
Lighting in mold space
Mold clamping systems in mechanical, electrical or hydraulic execution
Integration package (robot, feeder, dosing unit, TCU, mold integration)
WITTMANN BATTENFELD web service during warranty period free of charge
Remote control package



WITTMANN BATTENFELD GmbH

Wiener Neustädter Strasse 81
2542 Kottlingbrunn | Austria
Tel.: +43 2252 404-0
info@wittmann-group.com
www.wittmann-group.com